


FASTLINK 6-fiber pre-term

Basic characteristics

- ▲ 6-fiber pre-terminated indoor/outdoor minibreakout (distribution) cable
- ▲ Cost-effective patching solution

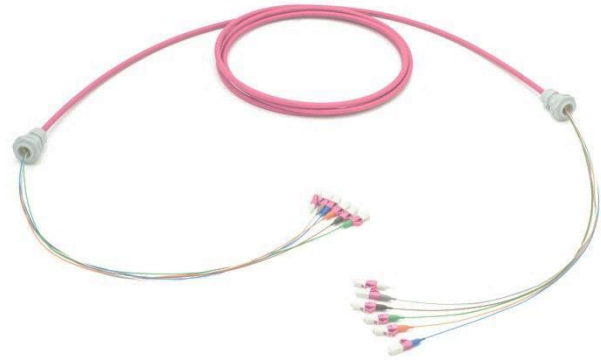

Cable parameters

Jacket material	LSZH	
Cable construction	Minibreakout (distribution)	
Outer diameter	5,5mm	
Fiber count	6	
Fiber type	SM or MMF OM3/OM4	
Temperature range	operation:	-20°C to +50°C
	storage:	-40°C to +60°C
	installation:	+5°C to +40°C

Connector parameters

	LC SM	LC MM
Compliance	Telcordia GR-326	Telcordia GR-326
Colour of housing	Blue/Green	Aqua/Magenta
Colour of boot	Same as colour of fiber	Same as colour of fiber
Polish	Flat (UPC)/ Angled (APC)	Flat (PC)
Insertion Loss	<0,25dB	<0,25dB
Return Loss	>50dB (UPC)/>60dB (APC)	>30dB

Identification

Traceability label with unique serial number on both ends of cable assembly.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.
Longer lengths coiled on cardboard reel.

* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk