

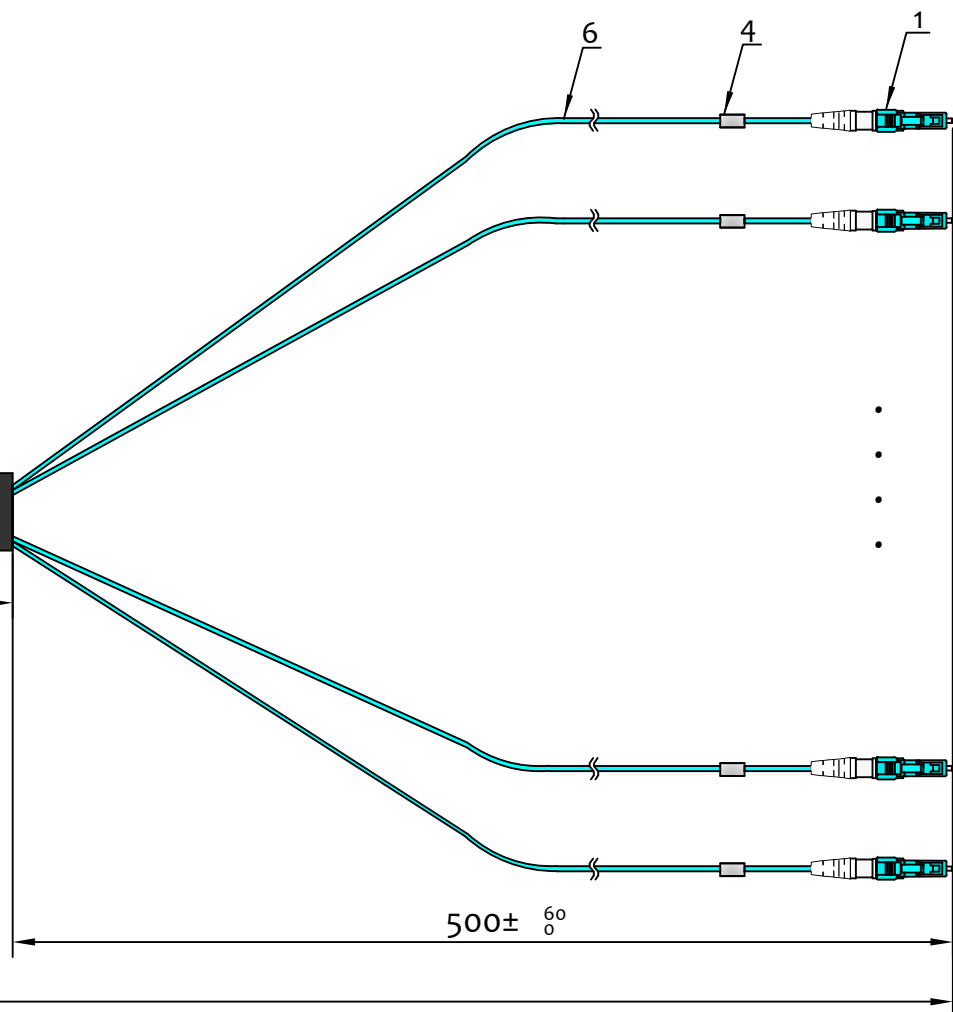
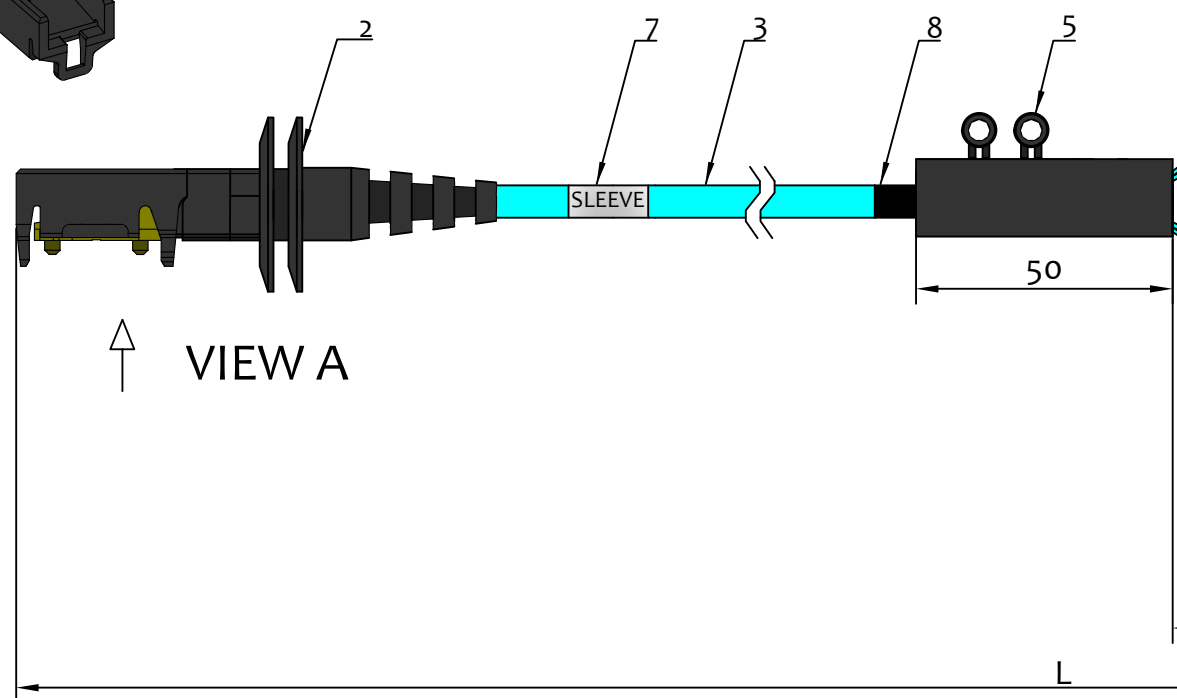


10	9	8	7	6	5	4	3	2	1
PRODUCT NUMBER :		L[m]	PRIZM LT IL	LC IL					
1-110-500-120-600/M1/XXXX		$L \pm 0^{,XX}$	at 850 nm						
			2.0 dB	0.25 dB					

LENGTH TOLERANCE	
Length interval(m)	Tolerance(m)
+1	+ 0,11
	- 0

XXXX IN THE PN REPRESENTS LENGTH OF ASSEMBLY AND VARIES FOR EACH LENGTH

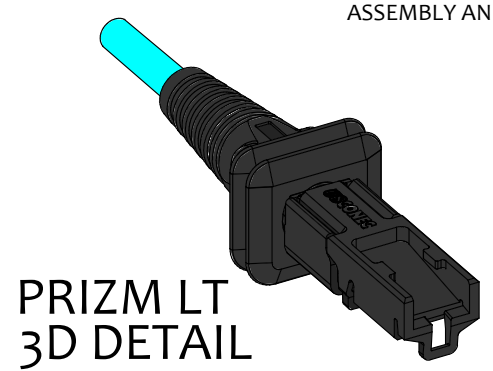

VN-035  
SLEEVE (POS. 7)


SN: XXXXX month/year  
www.sylex.sk

SLEEVE (POS. 4)



WIRE NUMBER (01-12)

PRIZM LT	FIBER	LC
1	BLUE	1
2	ORANGE	2
3	GREEN	3
4	BROWN	4
5	GREY	5
6	WHITE	6
7	RED	7
8	BLACK	8
9	YELLOW	9
10	PURPLE	10
11	PINK	11
12	AQUA	12

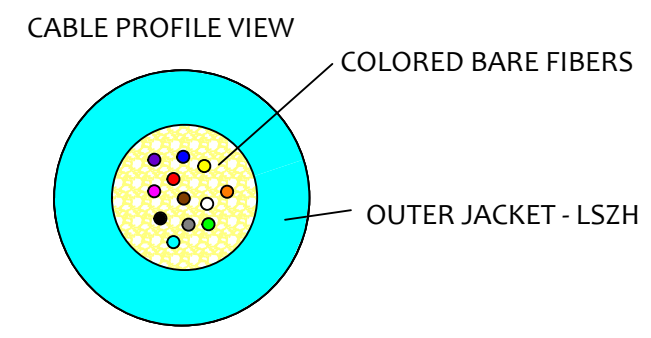

NO:	DESCRIPTION	QTY
1	LC 2.0mm CONNECTOR	12
2	PRIZM LT ROUND CONNECTOR	1
3	ROUND CABLE 12F OM3 1.8mm	L
4	MARKING SLEEVE 15mm	12
5	FANOUT BOX	1
6	TUBING 500/900, 1.95mm , AQUA	12
7	MARKING SLEEVE	1
8	SHRINK TUBE	1

- NOTES:
- 1- DUST CAPS ARE INCLUDED BUT NOT SHOWN
  - 2- ASSEMBLY PACKED ACCORDING TO PACKAGING SPECIFICATION: 1-B-1531
  - 3- CUMULATIVE TEST REPORT SYX-CTRT-01 OF MEASURED IL (LC,PRIZM LT) VALUES SENT ON DEMAND IN ELECTRONIC FORM
  - 4- VISUAL ASPECT OF LC CONNECTOR CHECK ACCORDING TO IEC 61300-3-35. END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
  - 5- SYLEX-SX-O LABEL ON PRODUCT PACKAGING AND OUTER CARDBOARD BOX

REVISION-DATE: A-30.04.2013	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2013/04/30	TITLE: PRIZM LT-LC OM3 12F round cable	
New drawing		CHECKED BY, DATE: E.Koza 2013/04/30		
REVISION-DATE: B-01.08.2014	CHANGE:	APPROVED BY, DATE: I.Golian 2013/04/30	PRODUCT SPECIFICATION: ID: 429	DIMENSIONS IN MM UNLESS SPECIFIED
Added information		PRODUCT NUMBER: 1-110-500-120-600/M1/xxxx	DRAWING NUMBER: 1-S-2015_1_C	SCALE: NO SCALE
REVISION-DATE: C-24.09.2015	CHANGE:	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 of 1
Length tolerance has changed		SIZE A3		