


1x12f MTP to 12xLC 900um 12-fiber direct split

Basic characteristic

- ▲ Fan-out legs protected 900um transparent tubing
- ▲ Female/male type of MTP® connector
- ▲ MTP® PRO connector optional

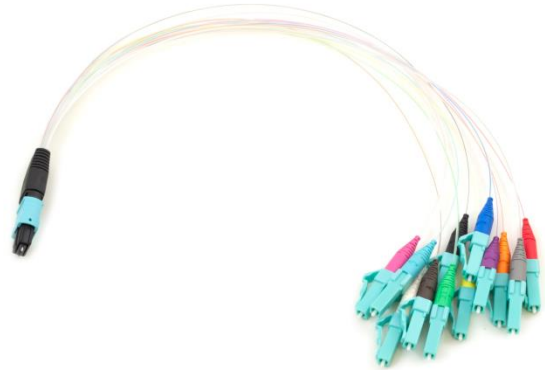

Applications

- ▲ Plug & Play modules

Temperature range

Controlled environment (-10°C/+60°C)

Cable parameters

Jacket material	Nylon	
Cable construction	Bare fibers	
Outer diameter	0,9mm	
Fiber count	12	
Fiber type	SM OS2 or MMF OM3/OM4	
Temperature range	operation:	-25°C to +70°C
	storage:	-25°C to +85°C
	installation:	-5°C to +50°C

1x12f MTP to 12xLC 900um 12-fiber direct split

Connector parameters

	MTP®/MTP® PRO SM/MM	LC SM/LC MM
Compliance	US CONEC standard	Telcordia GR-326
Color of connector	Green (APC) Aqua/Magenta	Blue/Green (APC) Aqua/Magenta
Color of boot	Black	Green (APC) White
Polish	Angled (APC) Flat	Angled (APC) Flat
Insertion Loss	<0,35dB	<0,25dB
Return Loss	>50dB (SM - APC) >20dB (MM - PC)	>60dB (SM - APC) >50dB (SM - UPC) >30dB (MM - PC)

Identification

Traceability label with unique serial number.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.

MTP is a registered trademark of US Conec, Ltd.
* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk