


LCD SFP patchcord

Basic characteristics

- ▲ Direct interconnection of SFP modules
- ▲ Laser optimised MM bend insensitive fiber

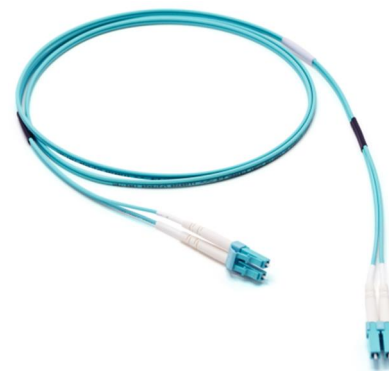

Temperature range

Controlled environment (-10°C/+60°C)

Cable parameters

Jacket material	LSZH	
Cable construction	Duplex cable	
Outer diameter	approx. 1,8mm x 3,7mm	
Fiber count	2	
Fiber type	MMF OM3/OM4	
Temperature range	operation:	-10°C to +70°C
	storage:	-25°C to +70°C
	installation:	-5°C to +50°C

Connector parameters

	LC MM
Compliance	Telcordia GR-326
Colour of housing	Aqua/Magenta
Colour of boot	White
Polish	Flat (PC)
Insertion Loss	<0,25dB
Return Loss	>30dB

Identification

Traceability label with unique serial number on both ends of cable assembly.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.

* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk