


Pigtail

Basic characteristics

- ▲ Standard easy-strip fiber pigtail
- ▲ Available in 12 colours of primary and secondary protection

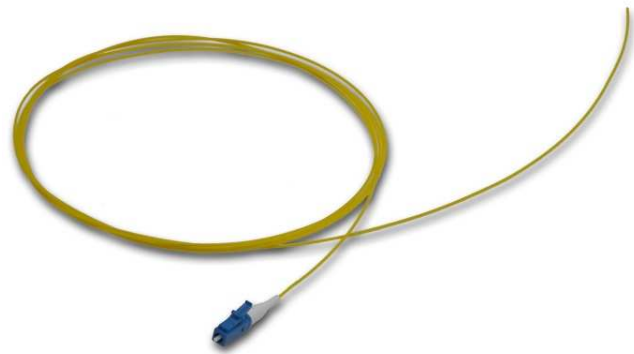

Applications

- ▲ Telecom / Datacom
- ▲ FTTH

Temperature range

Controlled environment (-10°C/+60°C)

Cable parameters

Jacket material	LSZH	
Cable construction	Buffered fiber	
Outer diameter	0.9mm	
Fiber count	1	
Fiber type	SM OS2 or MMF OM1/OM2/OM3/OM4	
Temperature range	operation:	-10°C to +70°C
	storage:	-25°C to +70°C
	installation:	-5°C to +50°C

Connector parameters

	LC, SC, ST, FC, E2000 (SM)	LC, SC, ST, FC, E2000 (MM)
Insertion Loss	<0,25dB	<0,25dB
Return Loss	>50dB (UPC)/>60dB (APC)	>30dB

Identification

Batch number on packaging label.

Packaging

12 pigtails in sealed PE bag, bulk pack in cardboard box.

* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk