

## SWS-36 S-line Switch 1x36

### Basic characteristic

- ▲ **S-line Switch 1x36** is extension module with 36 channels used for increasing the number of channels of S-line Scan 800 and S-line Scan 400 interrogators.
- ▲ **S-line Switch 1x36** is applicable for static measurement.



Illustrative picture

### Performance properties

Number of channels	36
Scanning frequency <sup>1)</sup>	0.5 Hz
Wavelength range	80nm (1510-1590nm)

<sup>1)</sup> Slower data logging is available through down sampling.

### Physical properties

Dimensions (without cable)	300x200x84mm
Weight (without cable)	4,04kg
Connector type	FC/APC
Interface	D-SUB

### Packaging

Cardboard box with dimensions: 364x351x140mm (see [Figure](#) )

Optional - Ruggedized transportation case with dimensions: 502x401x188mm (see [Figure](#) )

### Quality statement

All switches are 100% tested at SYLEX

Switch is manufactured according to ISO 9001:2008 and ISO 14001:2004

### Accessories (included):


- ▲ Standard extension patchcord (SPA-02)
- ▲ D-Sub adapter

### Recommended accessories within S-line family:

- ▲ S-line Scan 800 (SCN-80)
- ▲ S-line Scan 400 (SCN-40)
- ▲ S-line Splitters – 1x2 (SPL-02), 1x4 (SPL-04), 4x16 (SPL-16)

SWS-36 S-line Switch 1x36

Communication options example

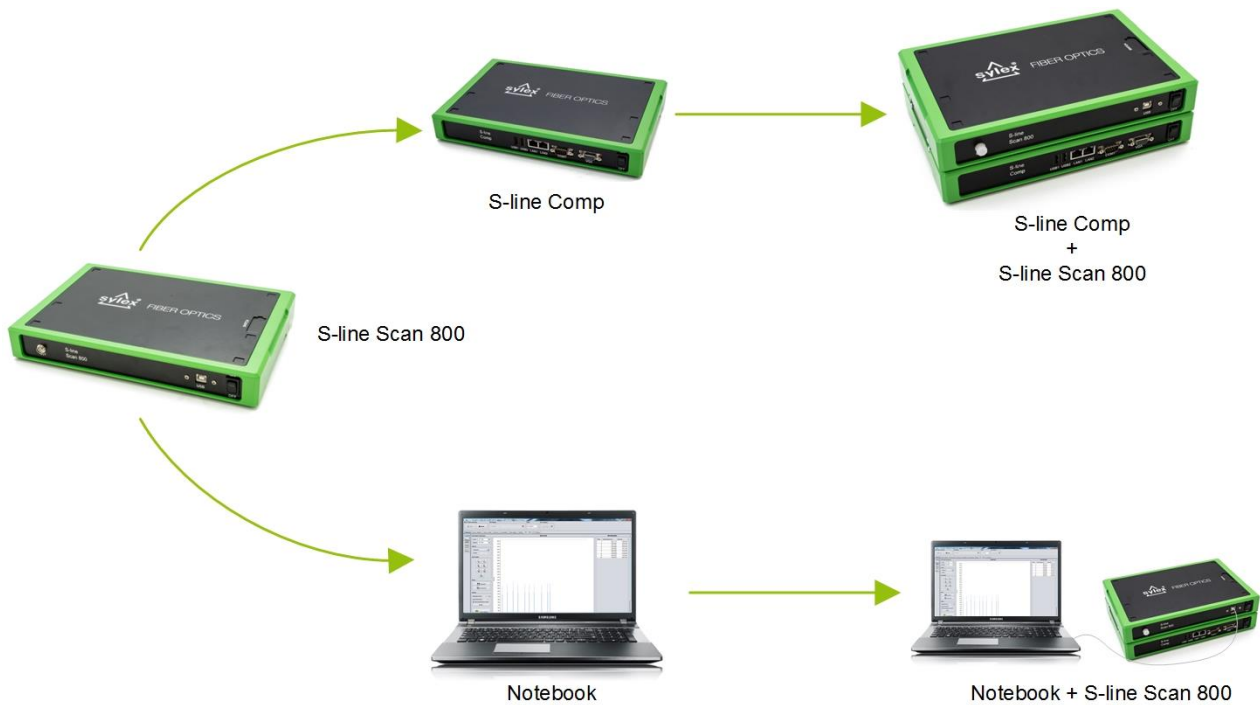

Packaging options



Figure 1: Cardboard box as standard packaging



Figure 2: Waterproof, crash proof and dust proof transportation case as optional packaging

For more information contact our sales team at [sales@sylex.sk](mailto:sales@sylex.sk)

\* Specifications are subject to change without notice