


## Pigtails

### Basic characteristics

- ▲ Standard easy-strip fiber pigtail
- ▲ Available in 12 colours of primary and secondary protection

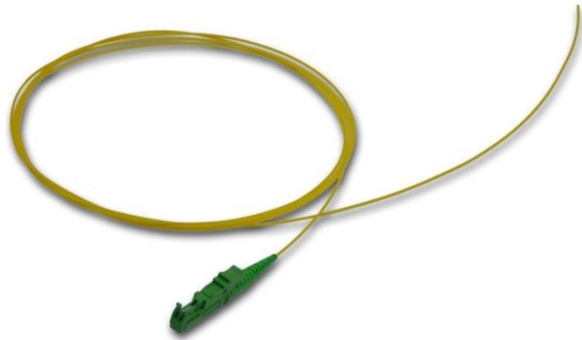

### Applications

- ▲ Telecom/Datacom
- ▲ FTTH

---

### Temperature range

Indoor controlled environment (-10°C /+60°C)

---

### Cable parameters

Jacket material	LSZH	
Cable construction	Buffered fiber	
Outer diameter	0.9mm / 2.0mm / 3.0mm	
Fiber count	1	
Fiber type	SM OS2 or MMF OM1/OM2/OM3/OM4	
Temperature range	operation:	-10°C to +70°C
	storage:	-25°C to +70°C
	installation:	-5°C to +50°C

---

### Connector parameters

	<b>LC, SC, ST, FC, E2000</b>
Insertion Loss (acc. IEC 61300-3-4 method B)	<0,25dB (@1310/1550nm) <0,25dB (@850/1300nm)
Return Loss (acc. IEC 61300-3-6)	>50dB(UPC) / >60dB(APC) (@1310/1550nm) >30dB (@850/1300nm)

---

### Identification

Traceability label with unique serial number.

---

### Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.  
Longer lengths coiled on cardboard/wooden reel.

\* Specifications are subject to change without notice

**For more information contact our sales team at [sales@sylex.sk](mailto:sales@sylex.sk)**