


Pigtails - set

Basic characteristics

- ▲ Standard easy-strip fiber pigtail
- ▲ Available in 12 colours of primary and secondary protection

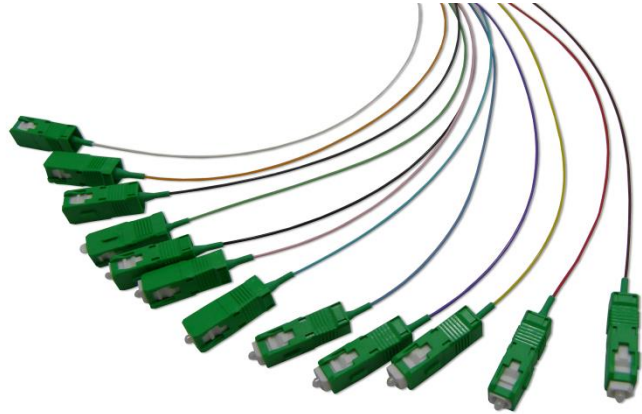

Applications

- ▲ Telecom/Datacom
- ▲ FTTH

Temperature range

Indoor controlled environment (-10°C /+60°C)

Cable parameters

Jacket material	LSZH	
Cable construction	Buffered fiber	
Outer diameter	0.9mm / 2.0mm / 3.0mm	
Fiber count	1	
Fiber type	SM OS2 or MMF OM1/OM2/OM3/OM4	
Temperature range	operation:	-10°C to +70°C
	storage:	-25°C to +70°C
	installation:	-5°C to +50°C

Connector parameters

LC, SC, ST, FC, E2000

Insertion Loss (acc. IEC 61300-3-4 method B)	<0,25dB (@1310/1550nm)
	<0,25dB (@850/1300nm)
Return Loss (acc. IEC 61300-3-6)	>50dB(UPC) / >60dB(APC) (@1310/1550nm)
	>30dB (@850/1300nm)

Identification

Traceability label with unique serial number.

Packaging

12 pigtails in sealed PE bag, bulk pack in cardboard box.
Longer lengths coiled on cardboard/wooden reel.

* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk