


**MTP PRO connector optional**

CONNECTION TABLE

| CONNECTION TABLE |     |
|------------------|-----|
| MTP              | LC  |
| 1                |     |
| 2                | 1B  |
| 3                | 2B  |
| 4                | 3B  |
| 5                | 4B  |
| 6                | 5B  |
| 7                | 6B  |
| 8                | 7B  |
| 9                | 8B  |
| 10               | 9B  |
| 11               | 10B |
| 12               |     |

CONNECTION TABLE

| CONNECTION TABLE |     |
|------------------|-----|
| MTP              | LC  |
| 13               |     |
| 14               | 1A  |
| 15               | 2A  |
| 16               | 3A  |
| 17               | 4A  |
| 18               | 5A  |
| 19               | 6A  |
| 20               | 7A  |
| 21               | 8A  |
| 22               | 9A  |
| 23               | 10A |
| 24               |     |

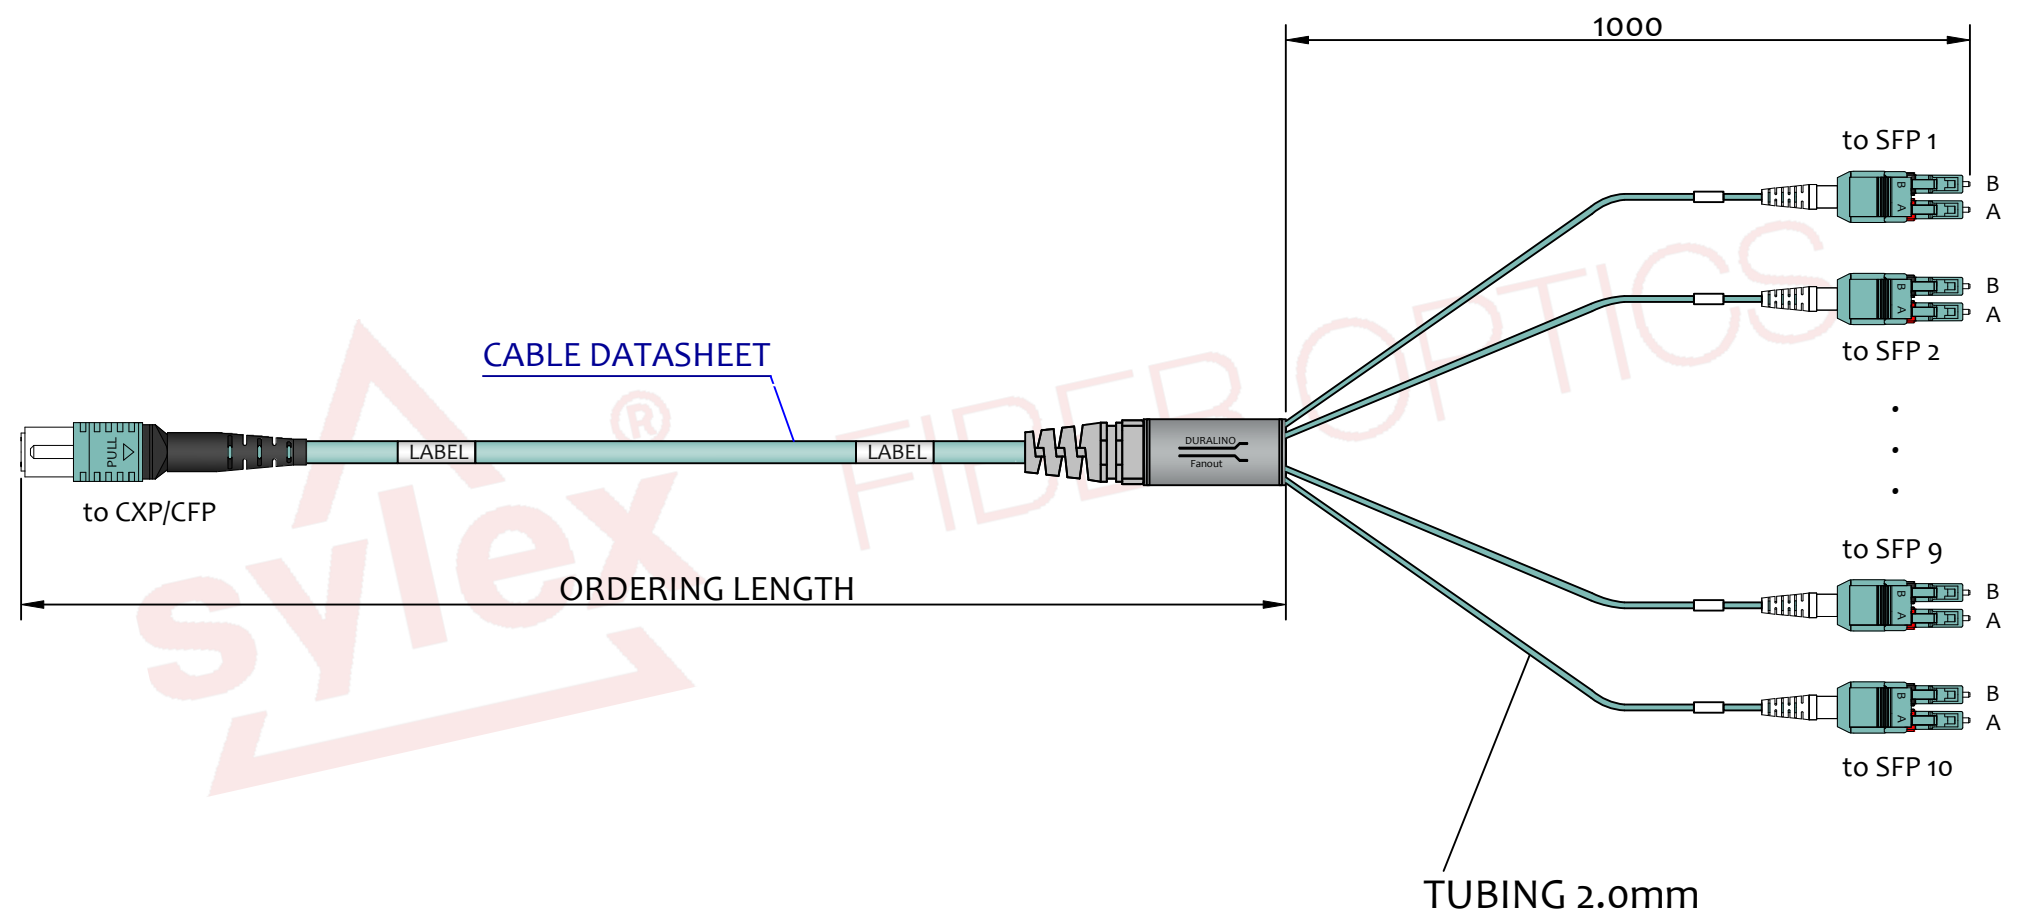

**ORDERING CODE**

**X20X-XXU-xxx-Q**

- Q** CXP/SFP connection
  - xxx** cable length [050 = 50m, 001 = 1m]
  - U** 2.0mm uniboot tubing
  - L** LC/PC
  - G** MTP(F) 24F, **K** MTP(F) PRO 24F
  - 3** OM3, **4** OM4
  - 20** 20F
  - F** fanout, **H** fanout with grommet \*
- \* SHOWN TRUNK VERSION WITH GROMMET [H]

**NOTES :**

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - LC: OM3, OM4- IL<0.25dB , RL>30dB , 850nm & 1300nm  
MTP: OM3, OM4 - IL<0.35dB , RL>20dB , 850nm & 1300nm  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
END FACE GEOMETRY ACCORDING TO TELCORDIA 63267-3-31
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,  
BULK PACK IN OUTER CARDBOARD BOX.  
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL,  
INSERTED IN CARDBOARD BOX ACCORDING TO SYLEX STANDARD [1-S-0011](#)
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES  
ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - NO PULLING SYSTEM IS APPLIED. AVAILABLE ON DEMAND
- 8 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER,  
DATE OF PRODUCTION AND ASSEMBLY LENGTH

|  |  |   |                              |                                   |
|--|--|---|------------------------------|-----------------------------------|
| REVISION-DATE: A - 12.05.2020<br>CHANGE: New drawing | DRAWN BY, DATE: M.Ruzbarsky 2020/05/12 | TITLE: 24f 1xMTP - 10xLCD Uniboot Duralino fanout CXP/SFP   |                              |                                   |
| REVISION-DATE: CHANGE:                               | CHECKED BY, DATE: Pavlov/Matúš         | APPROVED BY, DATE: I.Brestovanská   | PRODUCT SPECIFICATION: -     | DIMENSIONS IN MM UNLESS SPECIFIED |
| REVISION-DATE: X - DD.MM.YYYY<br>CHANGE:             | APPROVED BY, DATE: I.Brestovanská      | PRODUCT NUMBER: X20X-XXU-xxx-Q  | DRAWING NUMBER: 1-W-7768_1_A | SCALE: NO SCALE                   |
|  |  | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED |                              | SHEET NO. 1 of 1                  |
|  |  |   |                              | SIZE A3                           |