

SIDE A

SIDE B


TYPE A

TYPE B

SIDE A	SIDE B
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12

SIDE A	SIDE B
1	12
2	11
3	10
4	9
5	8
6	7
7	6
8	5
9	4
10	3
11	2
12	1

CABLE DATASHEET

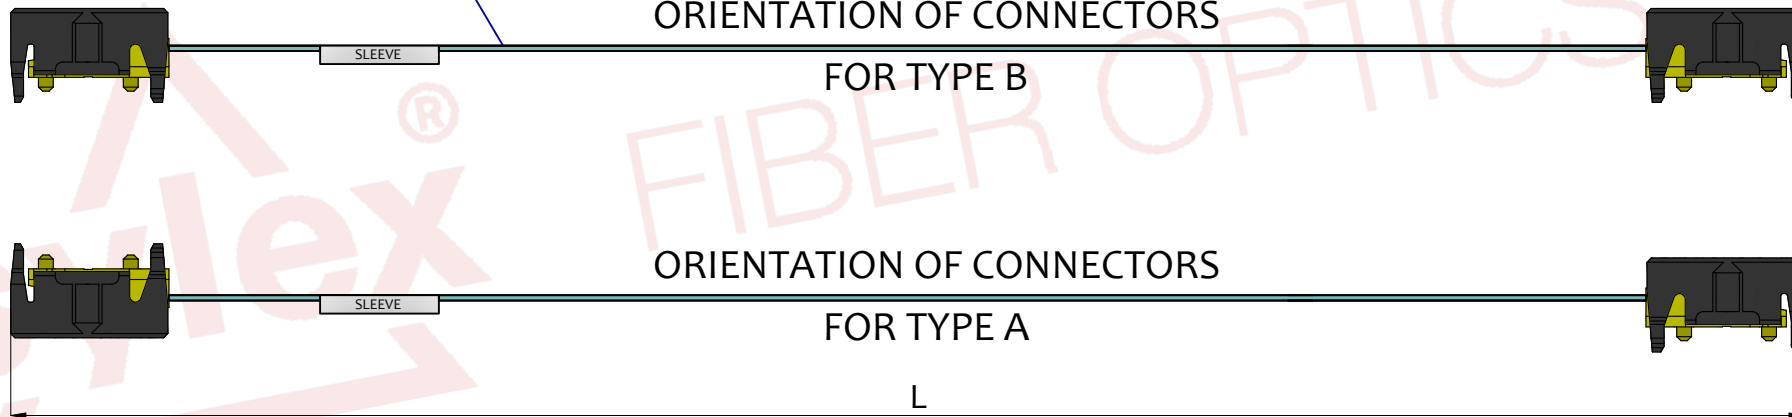

ORDERING CODE

B12X-OOX-xxxx-XX

- A Type A, B Type B
- 1 RIBBON PEELABLE, 2 RIBBON NON-PEELABLE
- CABLE LENGTH
- O PRIZM LT (low profile housing)
- O PRIZM LT (low profile housing)
- 3 OM3, 4 OM4
- 12 12F
- B On-Board Optics

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - OM3, OM4 (PRIZM LT) - IL<2.2dB , 850nm (CONNECTOR VALUE)  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
- 3 - CUMULATIVE TEST REPORT OF MEASURED IL, RL  
VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 4 - ASSEMBLY PACKED IN SEALED PE BAG  
BULK PACK IN OUTER CARDBOARD BOX
- 5 - TRACEABILITY LABEL ON THE CABLE CONTAINS  
SERIAL NUMBER AND ASSEMBLY LENGTH

ASSEMBLY LENGTH	TOLERANCE
0-1.00m	+0.01 -0.00
+1.01m	+0.03 -0.00

REVISION-DATE: A - 17.03.2020	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2020/10/14	TITLE: 01x PRIZM LT - 01x PRIZM LT 12F JUMPER		
New drawing		CHECKED BY, DATE: Matus/Smelh. 2020/10/14			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: L.Miskerik 2020/10/14	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: B12X-OOX-xxxx-XX	DRAWING NUMBER: 1-W-1872_1_A	SHEET NO. 1 of 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED			SIZE A3