


SIDE A

SIDE B

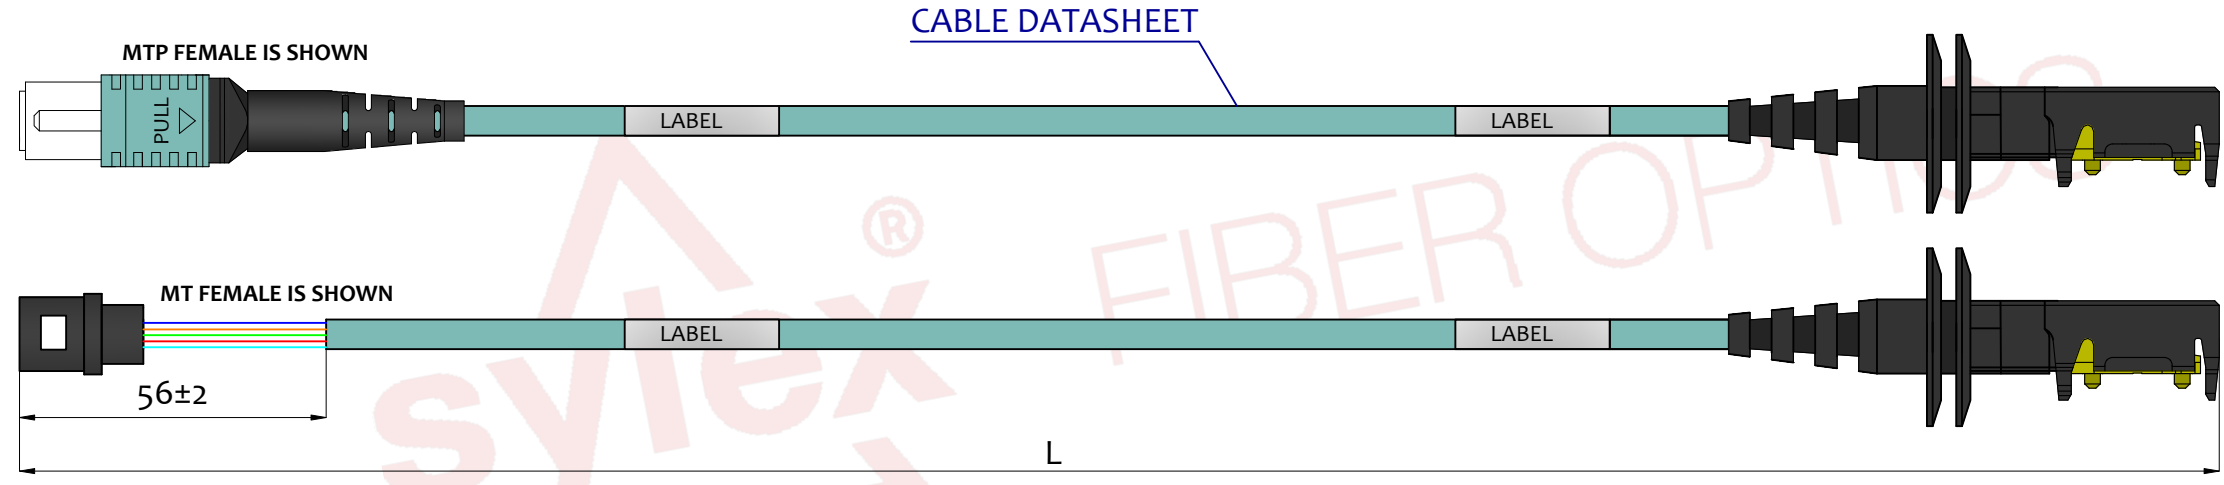

TYPE A

TYPE B

PRIZM LT	MTP
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12

PRIZM LT	MTP
1	12
2	11
3	10
4	9
5	8
6	7
7	6
8	5
9	4
10	3
11	2
12	1

ORDERING CODE

B12X-OXX-xxx-XX

- A Type A, B Type B, X Polarity on customer demand
- 3 ROUND CABLE
- xxx cable length [001 = 1m, 0015 = 1.5m]
- 1 MTP SHORT BOOT, 2 MTP STANDARD BOOT, X N/A
- F MTP FEMALE, M MTP MALE
- A MT FEMALE, B MT MALE
- O PRIZM LT (low profile housing)
- 3 OM3, 4 OM4
- 12 12F
- B On-Board Optics

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - OM3, OM4 (PRIZM LT) - IL<2.0dB , 850nm (CONNECTOR VALUE)
OM3, OM4 (MTP) - IL<0.35dB , 850nm (CONNECTOR VALUE)
RL>20dB , 850nm (GUARANTEED VALUE)
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 3 - MTP VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
MTP END FACE GEOMETRY ACCORDING TO IEC 63267-3-31
- 4 - CUMULATIVE TEST REPORT OF MEASURED IL, RL
VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 5 - ASSEMBLY PACKED IN SEALED PE BAG
BULK PACK IN OUTER CARDBOARD BOX
- 6 - TRACEABILITY LABEL ON THE CABLE CONTAINS
SERIAL NUMBER AND ASSEMBLY LENGTH

ASSEMBLY LENGTH	TOLERANCE
0-1.00m	+0.03 -0.00
+1.01m	+0.06 -0.00

REVISION-DATE: A - 04.07.2020	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2020/07/04	TITLE: 01x MT/MTP - 01x PRIZM LT 12F JUMPER		
New drawing		CHECKED BY, DATE: Matus/Smelh. 2020/03/17			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: L.Miskerik 2020/03/17	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: B12X-OOX-xxx-3X	DRAWING NUMBER: 1-W-1877_1_A	SHEET NO. 1 of 1	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
A			SIZE A3		