


SIDE A

SIDE B

TYPE A

| PRIZM LT 1 | MTP | PRIZM LT 2 | MTP |
|------------|-----|------------|-----|
| 1          | 1   | 1          | 13  |
| 2          | 2   | 2          | 14  |
| 3          | 3   | 3          | 15  |
| 4          | 4   | 4          | 16  |
| 5          | 5   | 5          | 17  |
| 6          | 6   | 6          | 18  |
| 7          | 7   | 7          | 19  |
| 8          | 8   | 8          | 20  |
| 9          | 9   | 9          | 21  |
| 10         | 10  | 10         | 22  |
| 11         | 11  | 11         | 23  |
| 12         | 12  | 12         | 24  |

| PRIZM LT 3 | MTP | PRIZM LT 4 | MTP |
|------------|-----|------------|-----|
| 1          | 25  | 1          | 37  |
| 2          | 26  | 2          | 38  |
| 3          | 27  | 3          | 39  |
| 4          | 28  | 4          | 40  |
| 5          | 29  | 5          | 41  |
| 6          | 30  | 6          | 42  |
| 7          | 31  | 7          | 43  |
| 8          | 32  | 8          | 44  |
| 9          | 33  | 9          | 45  |
| 10         | 34  | 10         | 46  |
| 11         | 35  | 11         | 47  |
| 12         | 36  | 12         | 48  |





MTP FEMALE IS SHOWN



MT FEMALE IS SHOWN

SLEEVE

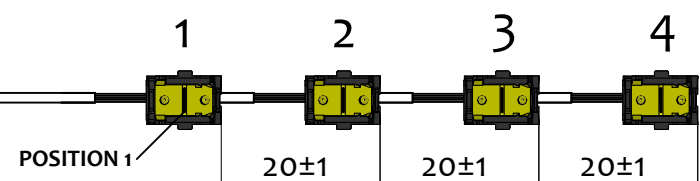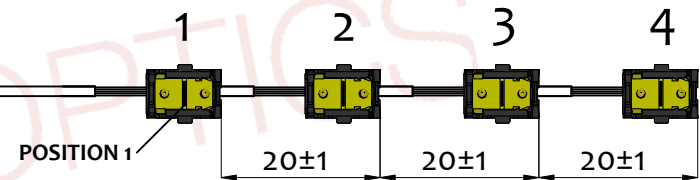

L

ORDERING CODE

B48X-OXX-xxxx-XX

- A Type A, X Polarity on customer demand
- 3 ROUND CABLE
- CABLE LENGTH
- 1 MTP SHORT BOOT, 2 MTP STANDARD BOOT, X N/A
- 2 MTP FEMALE, 3 MTP MALE
- E MT FEMALE, H MT MALE
- 0 PRIZM LT (low profile housing)
- 3 OM3, 4 OM4
- 48 48F
- B On-Board Optics

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - OM3, OM4 (PRIZM LT) - IL<2.0dB , 850nm (CONNECTOR VALUE)  
OM3, OM4 (MTP) - IL<0.6dB , 850nm (CONNECTOR VALUE)  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
- 3 - MTP VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35  
MTP END FACE GEOMETRY ACCORDING TO IEC 63267-3-31
- 4 - CUMULATIVE TEST REPORT OF MEASURED IL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 5 - ASSEMBLY PACKED IN SEALED PE BAG  
BULK PACK IN OUTER CARDBOARD BOX
- 6 - TRACEABILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER AND ASSEMBLY LENGTH

| ASSEMBLY LENGTH | TOLERANCE      |
|-----------------|----------------|
| 0-1.00m         | +0.03<br>-0.00 |
| +1.01m          | +0.06<br>-0.00 |

|                               |         |   |   |                                   |                 |
|-------------------------------|---------|---|---|-----------------------------------|-----------------|
| REVISION-DATE: A - 17.03.2020 | CHANGE: | DRAWN BY, DATE: M.Ruzbarsky 2020/10/14  | TITLE: 01x MT/MTP - 04x PRIZM LT 48F JUMPER |                                   |                 |
| New drawing                   |         | CHECKED BY, DATE: Matus/Smelh. 2020/10/14   |   |                                   |                 |
| REVISION-DATE:                | CHANGE: | APPROVED BY, DATE: L.Miskerik 2020/10/14  | PRODUCT SPECIFICATION: -                    | DIMENSIONS IN MM UNLESS SPECIFIED | SCALE: NO SCALE |
| REVISION-DATE:                | CHANGE: | PRODUCT NUMBER: B48X-OXX-xxxx-XX  | DRAWING NUMBER: 1-W-8219_1_A                | SHEET NO. 1 of 1                  |                 |
|                               |         | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED |   |                                   | SIZE A3         |