


FRONT PANEL

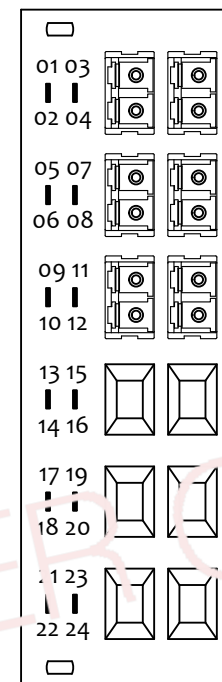

BLIND
13 - 24

ADAPTERS COLOUR

MODE	LCD
OS2	BLUE
OS2-APC	GREEN
OM3	AQUA
OM4	MAGENTA
OM5	LIME

ORDERING CODE

W12X-XDX-ALM

L LC/PC, A LC/APC (pigtail)

9 OS2, 3 OM3, 4 OM4, 5 OM5

W WENDY

NOTES:

- 1 - OM3, OM4, OM5: IL<0.25dB , RL>30dB , 850nm & 1300nm
OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm

IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
 RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
 END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326

- 2 - SYLEX-SX-O LABEL ON PRODUCT PACKAGING AND MASTER CARDBOARD BOX
- 3 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM

REVISION-DATE: A - 11.06.2021	CHANGE:	DRAWN BY, DATE: P. Gaspar 2021/06/11	TITLE: 6xLC DUPLEX SPLICE MODULE FULLY LOADED		
NEW DRAWING		CHECKED BY, DATE: L.Miskerik 2021/06/11			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh. 2021/06/11	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: W12X-XDX-ALM	DRAWING NUMBER: 1-W-4150_1_A	SHEET NO. 1 of 1	
		A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
				SIZE A3	