



VIEW TO CONNECTOR
MPO MALE



VIEW TO CONNECTOR
MPO FEMALE

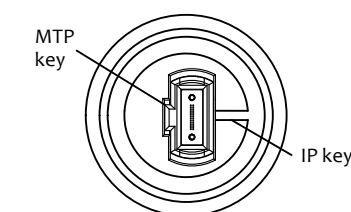

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, - IL<0.35dB , RL>20dB , 850nm & 1300nm
OS2 - IL<0.35dB, RL>50dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector - APC polished)
END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (Multifiber connector - FLAT polished)
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,
BULK PACK IN OUTER CARDBOARD BOX.
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL,
INSERTED IN CARDBOARD BOX ACCORDING TO SYLEX STANDARD [1-S-0011](#)
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES
ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER,
DATE OF PRODUCTION AND ASSEMBLY LENGTH
- 8 - TYPE OF POLARITIES ACCORDING TO [SPECIFICATION](#)

ORDERING CODE

R24X-XXX-XXX

- xxx cable length [050 = 50m, 001 = 1m]
- A - Polarity A, B - Polarity B
- C IP MPO(F), D IP MPO(M)
- C IP MPO(F), D IP MPO(M)
- 9 OS2, 3 OM3, 4 OM4
- 24 24F

REVISION-DATE: A - 22.10.2021	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2021/10/22	TITLE: 24f 1xMPO IP - 1xMPO IP Trunk		
New drawing		CHECKED BY, DATE: L.Miskerik			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh.	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: R24X-XXX-xxx	DRAWING NUMBER: 1-W-8696_1_A	SHEET NO. 1 of 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED			SIZE A3