


SIDE A

SIDE B

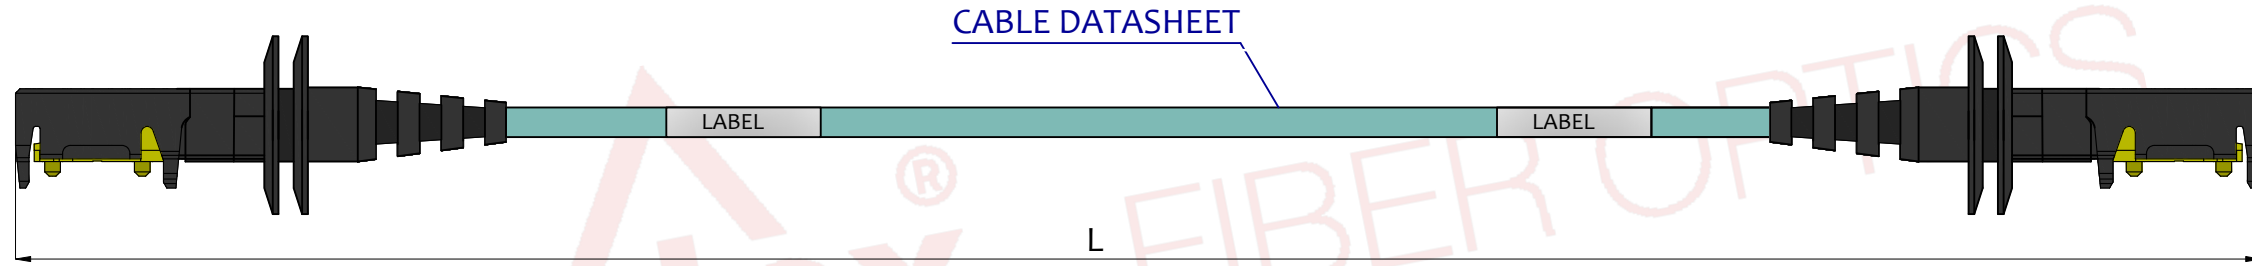

CABLE DATASHEET

TYPE A

TYPE B

SIDE A	SIDE B
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12

SIDE A	SIDE B
1	12
2	11
3	10
4	9
5	8
6	7
7	6
8	5
9	4
10	3
11	2
12	1

ORDERING CODE

B12X-OOX-xxx-3X

- B** On-Board Optics
- 12** 12F
- 3** OM3, **4** OM4
- O** PRIZM LT (low profile housing)
- O** PRIZM LT (low profile housing)
- xxx** cable length [001 = 1m, 0015 = 1.5m]
- 3** ROUND CABLE
- A** Type A, **B** Type B

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - OM3, OM4 - IL<2.2dB , 850nm (CONNECTOR VALUE)
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
- 3 - CUMULATIVE TEST REPORT OF MEASURED IL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 4 - ASSEMBLY PACKED IN SEALED PE BAG
BULK PACK IN OUTER CARDBOARD BOX
- 5 - TRACEABILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER AND ASSEMBLY LENGTH

ASSEMBLY LENGTH	TOLERANCE
0-1.00m	+0.01 -0.00
+1.01m	+0.03 -0.00

REVISION-DATE: A - 04.07.2020 CHANGE: New drawing	DRAWN BY, DATE: M.Ruzbarsky 2020/07/04	TITLE: 01x PRIZM LT - 01x PRIZM LT 12F JUMPER		
REVISION-DATE: _____ CHANGE: _____	CHECKED BY, DATE: Matus/Smelh. 2020/03/17	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY CHANGE: _____	APPROVED BY, DATE: L.Miskerik 2020/03/17	PRODUCT NUMBER: B12X-OOX-xxx-3X	DRAWING NUMBER: 1-W-1878_1_A	SHEET NO. 1 of 1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
		SIZE A3		