


PRODUCT NUMBER :	L[m]	PRIZM LT IL at 850 nm	CONNECTION
1-500-500-120-67B/l1/XXXX	$L \pm 0.0X$	2.2 dB	TYPE A
1-500-500-120-67B/l2/XXXX	$L \pm 0.0X$	2.2 dB	TYPE B

LENGTH TOLERANCE	
Length interval(m)	Tolerance(m)
0 - 0,500	+ 0,03 - 0
+0,501	+ 0,06 - 0

XXXX IN THE PN REPRESENTS LENGTH OF ASSEMBLY AND VARIES FOR EACH LENGTH

SIDE A

SIDE B



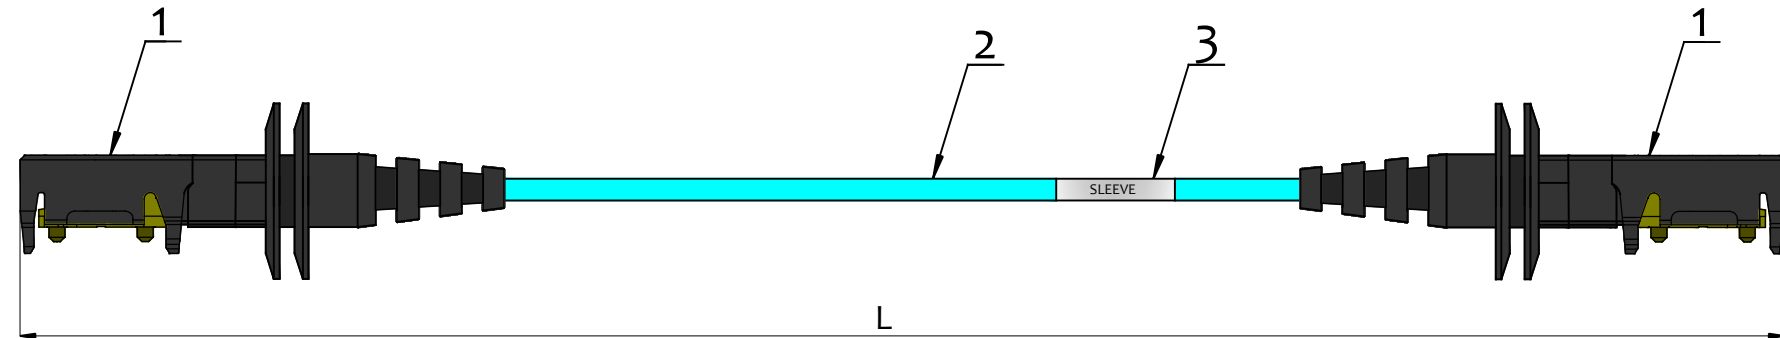


VIEW A

VIEW A

VIEW B


VIEW B

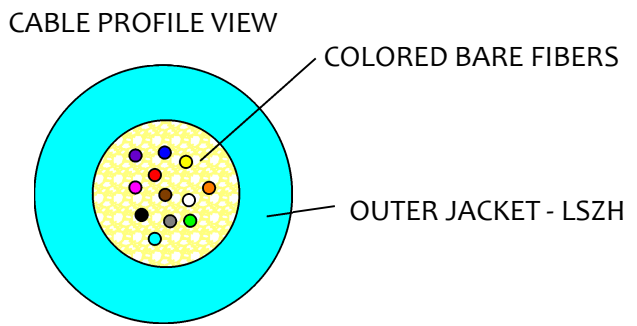

CONNECTION - TYPE A		
SIDE A	FIBER COLOUR	SIDE B
1	BLUE	1
2	ORANGE	2
3	GREEN	3
4	BROWN	4
5	GREY	5
6	WHITE	6
7	RED	7
8	BLACK	8
9	YELLOW	9
10	PURPLE	10
11	PINK	11
12	AQUA	12

CONNECTION - TYPE B		
SIDE A	FIBER COLOUR	SIDE B
1	BLUE	12
2	ORANGE	11
3	GREEN	10
4	BROWN	9
5	GREY	8
6	WHITE	7
7	RED	6
8	BLACK	5
9	YELLOW	4
10	PURPLE	3
11	PINK	2
12	AQUA	1

PRIZM LT 3D DETAIL

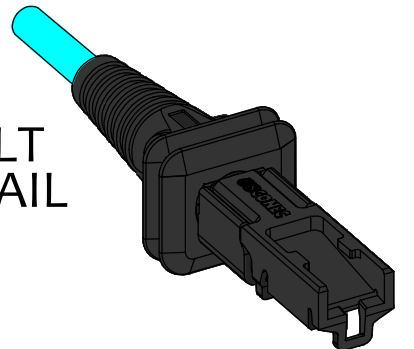

VN-036
MARKING SLEEVE(POS. 3)

SN: XXXXX	month/year
www.sylex.sk	TYPE X

BOM		
NO:	DESCRIPTION	QTY:
1	PRIZM LT CONNECTOR	2
2	ROUND CABLE 1.8mm 12F OM3 AQUA	L
3	MARKING SLEEVE 25mm	1

- NOTES:
- DUST CAPS ARE INCLUDED BUT NOT SHOWN
 - ASSEMBLY PACKED ACCORDING TO PACKAGING SPECIFICATION: 1-B-1531
 - CUMULATIVE TEST REPORT SYX-CTRT-01 OF MEASURED IL (PRIZM LT) VALUES SENT ON DEMAND IN ELECTRONIC FORM
 - SYLEX-SX-O LABEL ON PRODUCT PACKAGING AND OUTER CARDBOARD BOX

REVISION-DATE: B - 12.02.2013	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 28.01.2013	TITLE: PRIZM LT-PRIZM LT OM3 round cable assembly		
Add connection TYPE B		CHECKED BY, DATE: E.Koza 04.02.2013	PRODUCT SPECIFICATION: ID: 429		
Add connection table		APPROVED BY, DATE: I.Golian 04.02.2013	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE	
Changed wiring views		PRODUCT NUMBER: 1-500-500-120-67B/lx/xxxx	DRAWING NUMBER: 1-S-1878_1_D	SHEET NO. 1 of 1	
REVISION-DATE: C - 01.08.2014	CHANGE:	Added information	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
REVISION-DATE: D - 24.09.2015	CHANGE:	Length tolerance has changed	SIZE A3		