



REAR VIEW

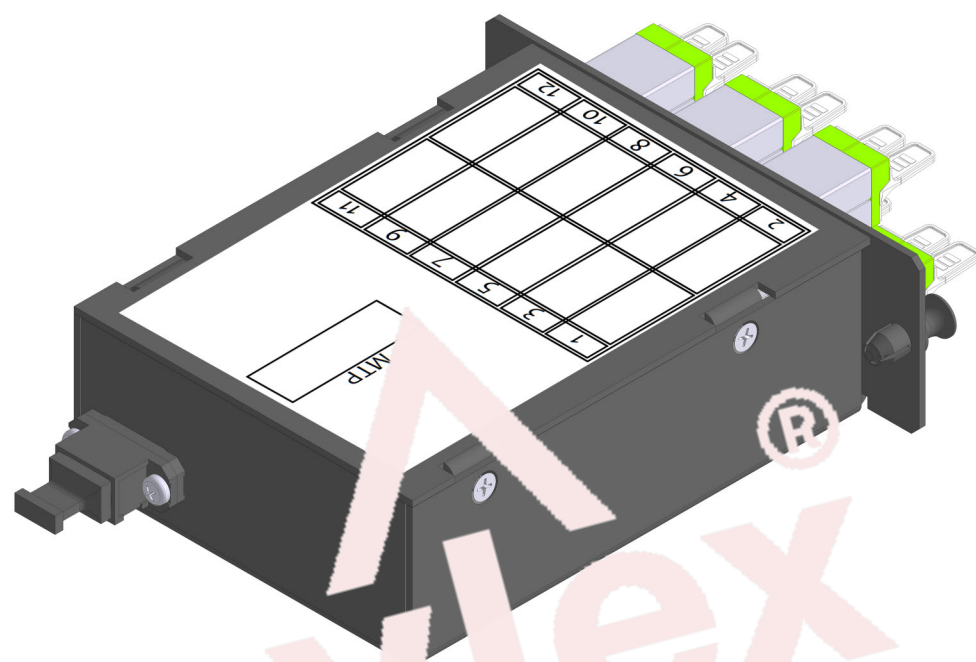

FRONT VIEW

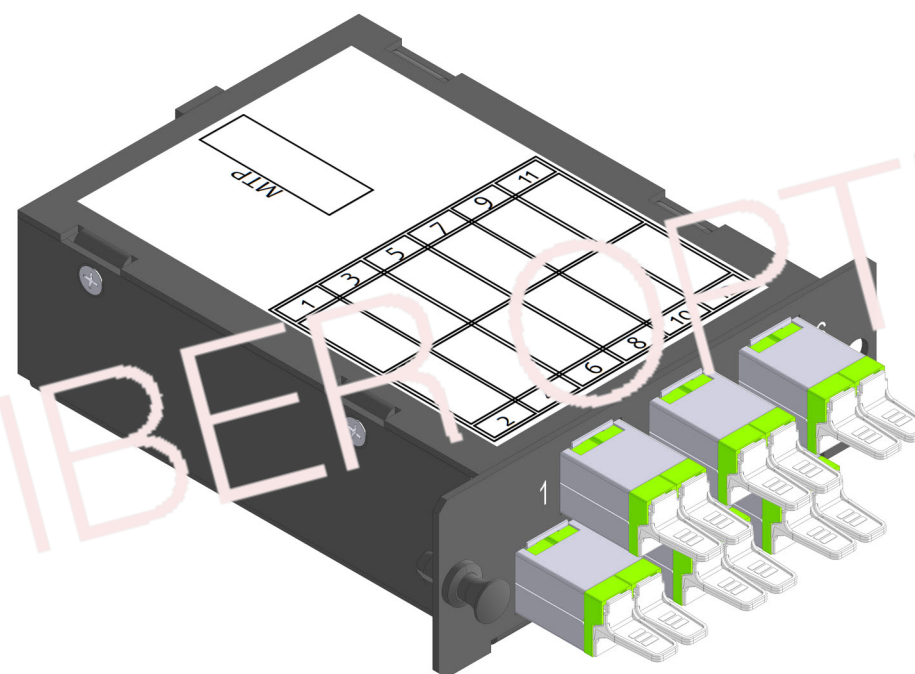

ADAPTERS COLOUR

MODE	MTP	E2000
OS2	GREEN	BLUE
OS2-APC	GREEN	GREEN
OM3	AQUA	BLACK
OM4	MAGENTA	BLACK
OM5	LIME	LIME

ORDERING CODE

M12**X**-**XX**2-**BLS**

F MTP female, M MTP male (direct split)

E E200/PC, C E2000/APC (direct split)

9 OS2, 3 OM3, 4 OM4, 5 OM5

M MTP PANEL SYSTEM

NOTES:

1 - OM3, OM4: IL<0.6dB AT 850nm AND 1300nm - CHANNEL VALUE ACCORDING IEC 61280-4-1 ONE-CORD REFERENCE METHOD

RL>19.6dB AT 850nm AND 1300nm - CHANNEL GUARANTEED VALUE

OS2: IL<0.6dB AT 1310nm AND 1550nm - CHANNEL VALUE ACCORDING IEC 61280-4-1 ONE-CORD REFERENCE METHOD

RL>47B (UPC) AT 1310nm AND 1550nm - CHANNEL GUARANTEED VALUE

RL>49.6B (APC) AT 1310nm AND 1550nm - CHANNEL GUARANTEED VALUE

VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35

END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326 (Singlefiber connector)

END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector - APC polished)

END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (Multifiber connector - FLAT polished)

2 - SYLEX-SX-O LABEL ON PRODUCT PACKAGING AND MASTER CARDBOARD BOX

3 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM

REVISION-DATE: A - 13.01.2020	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2020/01/13	TITLE: 1x12f MTP to 6x E2000 DUPLEX MODULE	
New drawing		CHECKED BY, DATE: Pavlov/Matúš 2020/01/13		
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanská 2020/01/13	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED
		PRODUCT NUMBER: M12X-XX2-BLS	DRAWING NUMBER: 1-S-2955_1_A	SCALE: NO SCALE
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		SHEET NO. 1 of 1
				SIZE A3