


1  
2  
F  
I  
B  
E  
R  
S

1  
2  
F  
I  
B  
E  
R  
S

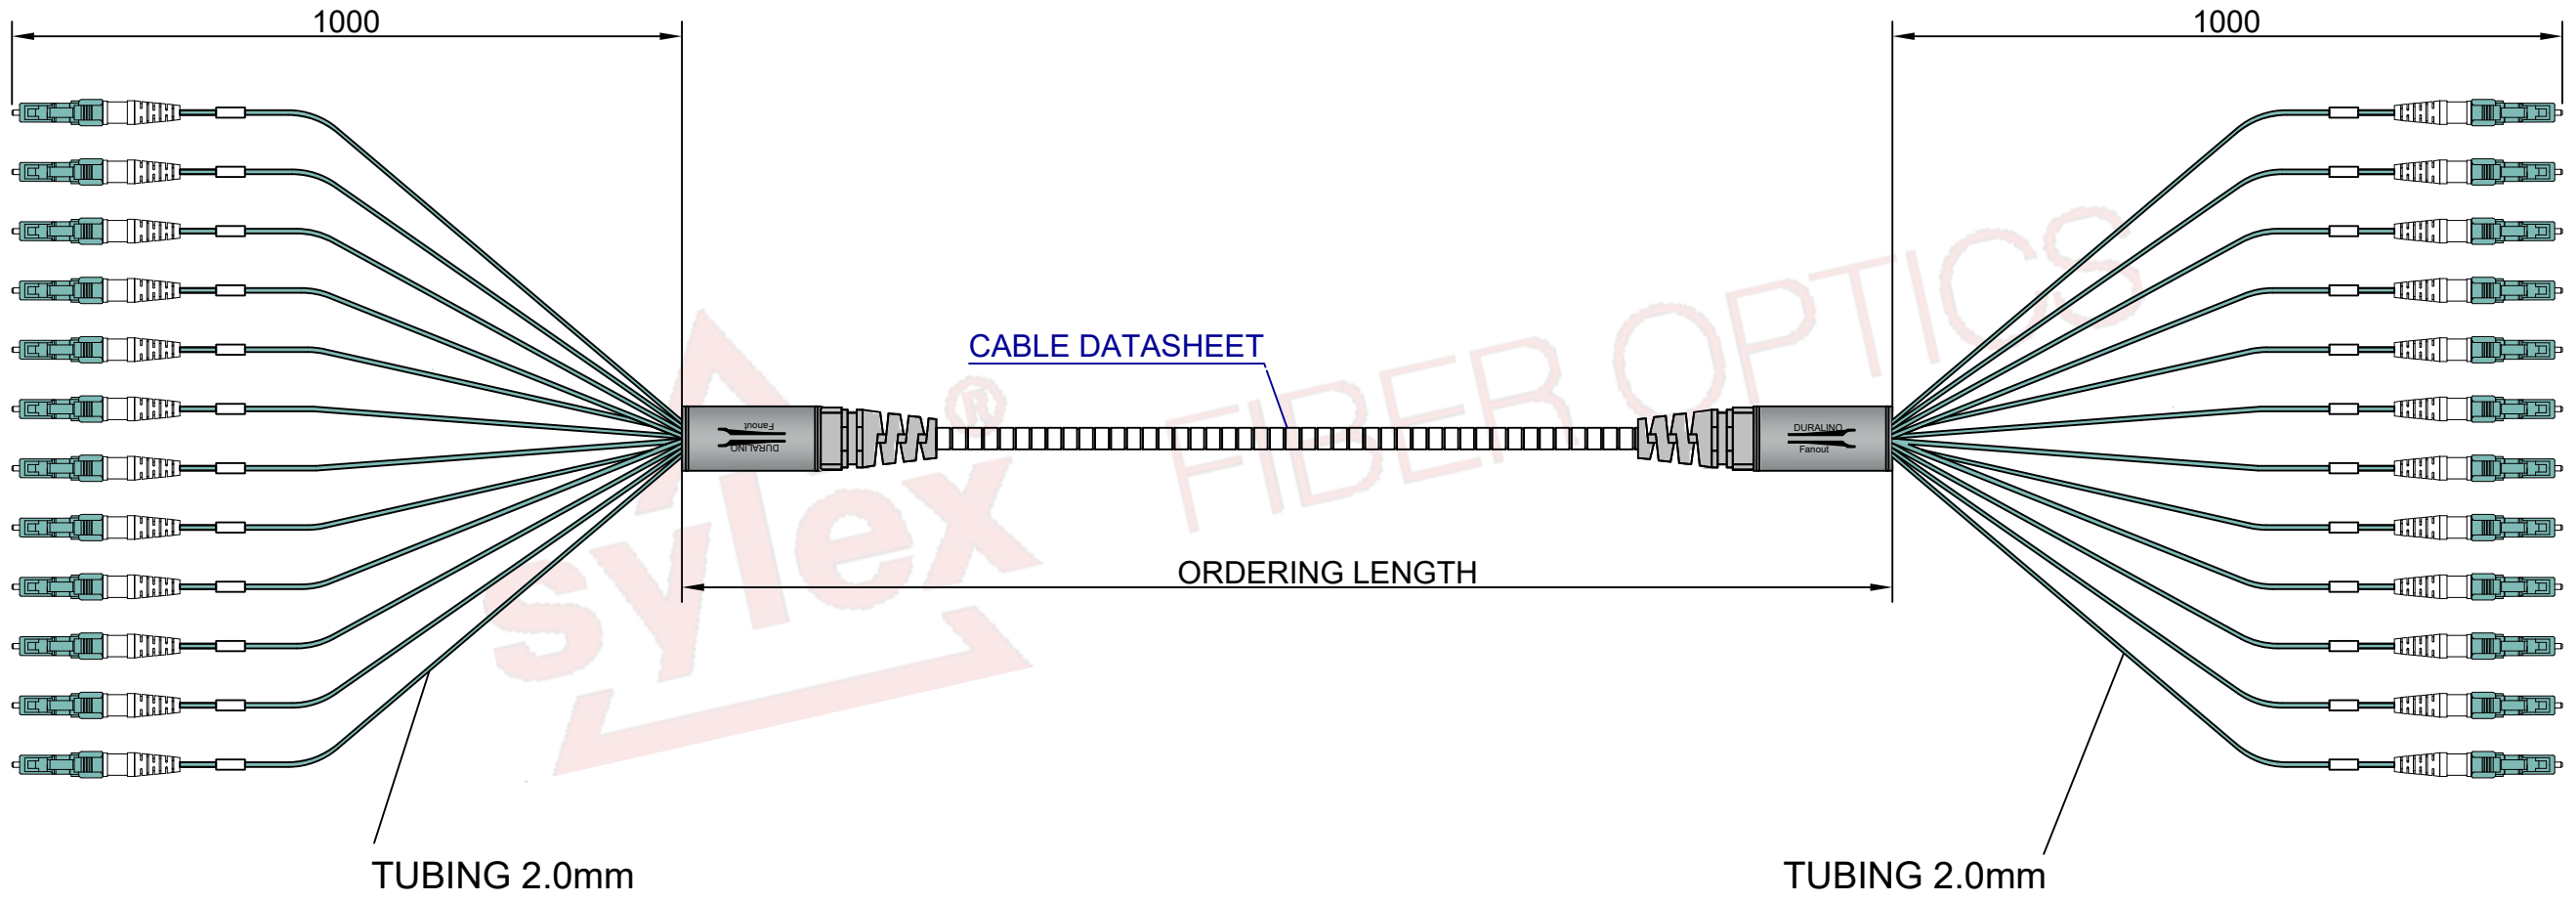

**NOTES :**

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm  
OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm  
LC/UPC - RL>50dB, 1310nm & 1550nm  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,  
BULK PACK IN OUTER CARDBOARD BOX.  
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL,  
INSERTED IN CARDBOARD BOX ACCORDING TO SYLEX STANDARD [1-S-0011](#)
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES  
ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - PULLING SYSTEM ON ONE SIDE IS PART OF THE ASSEMBLY (NOT SHOWN)
- 8 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER,  
DATE OF PRODUCTION AND ASSEMBLY LENGTH

**ORDERING CODE**

**X12X-XXS-xxx-M**

- M** miniflex cable
  - xxx** cable length [050 = 50m, 001 = 1m]
  - S** 2.0mm simplex tubing
  - AA** LC/APC-LC/APC, **LL** LC/PC-LC/PC \*
  - 9** OS2, **3** OM3, **4** OM4, **5** OM5
  - 12** 12F
  - T** trunk, **G** trunk with grommet \*\*
- \* OTHER CONNECTOR TYPES ON REQUEST  
\*\* SHOWN TRUNK VERSION WITH GROMMET [G]

REVISION-DATE: A - 26.06.2019	CHANGE:	DRAWN BY, DATE: P. Gašpár 2019/06/26	TITLE: 12f LC-LC Duralino Miniflex Trunk		
New drawing		CHECKED BY, DATE: Pavlov/Matúš 2019/06/26			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I. Brestovanská 2019/06/26	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: X12X-XXS-xxx-M	DRAWING NUMBER: 1-S-7163_1_A	SHEET NO. 1 of 1	
A			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
			SIZE A3		