

## SCN-80 S-line Scan 800

### Basic characteristic

- ▲ **S-line Scan 800** is interrogator with one optical channel typically used as a base module within the S-line product family.
- ▲ **S-line Scan 800** is extendable with S-line Switch, Splitter or Computer modules.
- ▲ **S-line Scan 800** is provided with Sentinel 2.0 and Sentinel D measurement software.
- ▲ **S-line Scan 800's** depolarized light source greatly reduces unwanted polarization effects.
- ▲ **S-line Scan 800** can be also simply re-configured into S-line Scan 804 or 804D, S-line Scan 816 or S-line Scan 836 by stacking on the 1x4, 1x4D, 1x16 or 1x36 switch modules.



### Performance properties

Number of channels		1
Scanning frequency <sup>1)</sup>		up to 5 kHz
Wavelength range		80nm (1510-1590nm)
Operational Temperature range		-5°C to +50°C
Storage Temperature range		-10°C to +60°C
Dynamic range <sup>2)</sup>		30dB
Power budget <sup>3)</sup>		18dB
Accuracy	@ 25°C // @ FOTR <sup>4)</sup>	TBT // ±13pm
Repeatability (Precision)	@ 25°C // @ FOTR <sup>4)</sup>	6pm // 12pm
Resolution		1pm
Laser Class	IEC 60825-1	1

1) Slower data logging is available through down sampling.

2) Maximum attenuation that can be inserted in the optical line between the interrogator and the measured FBG, or series of FBG's on a same power level (see [Figure 1](#)).

3) Maximum attenuation that can be inserted between the FBG's with the highest and lowest power level in one channel (see [Figure 2](#)).

4) FOTR = Fully Operational Temperature Range (-5°C to +50°C).

All parameters tested with FBG's FWHM 200pm and 40% Reflectivity.

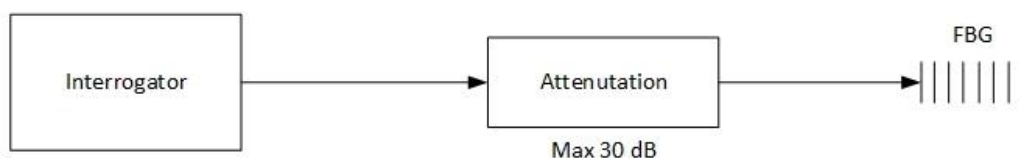


Figure 1: Max. allowed attenuation within optical line (bidirectional)

SCN-80 S-line Scan 800

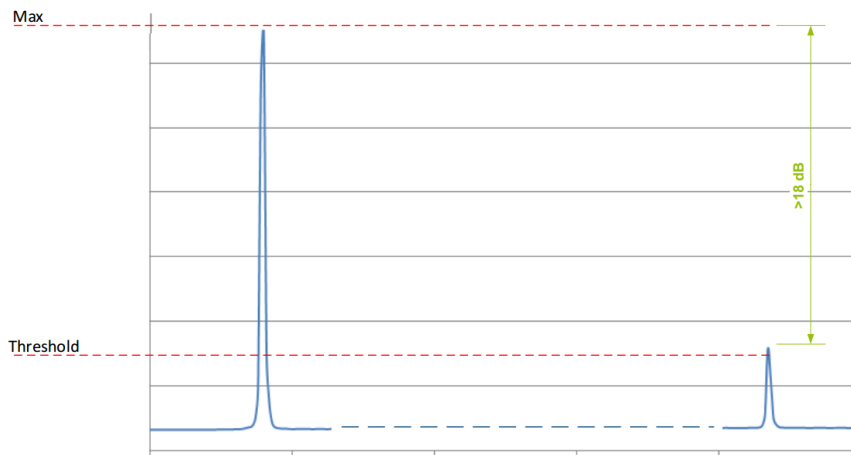


Figure 2: Power budget

**Physical properties**

Dimensions (without cable)	300x200x42mm
Weight (without cable)	2,25kg
Connector type	FC/APC
Power consumption	6W (9-18V) (universal adapter included)
Interface	USB

**Packaging**

Standard - Cardboard box with dimensions: 364x351x140mm (see [Figure 3](#))

Optional - Ruggedized transportation case with dimensions: 502x401x188mm (see [Figure 4](#))

**Quality statement**

All interrogators are 100% tested at SYLEX  
Interrogator is manufactured according to ISO 9001:2008 and ISO 14001:2004


**Accessories (included):**

- ▲ Sentinel 2.0 – automated data acquisition and evaluation software
- ▲ Standard extension patchcord (SPA-02)
- ▲ Power adapter, 90-264V input range, 12V/2A output, with EU-UK-US compatible sockets

**Recommended accessories within S-line family:**

- ▲ S-line Switches – 1x4 (SWx-04), 1x16 (SWS-16), 1x36 (SWS-36)
- ▲ S-line Comp (SPC-02)
- ▲ S-line Splitters – 1x2 (SPL-02), 1x4 (SPL-04), 4x16 (SPL-16)
- ▲ S-line View 1.0 – web-based data management software for collection, analysis, validation and visualization of measured data
- ▲ Transportation case

**Communication options example**

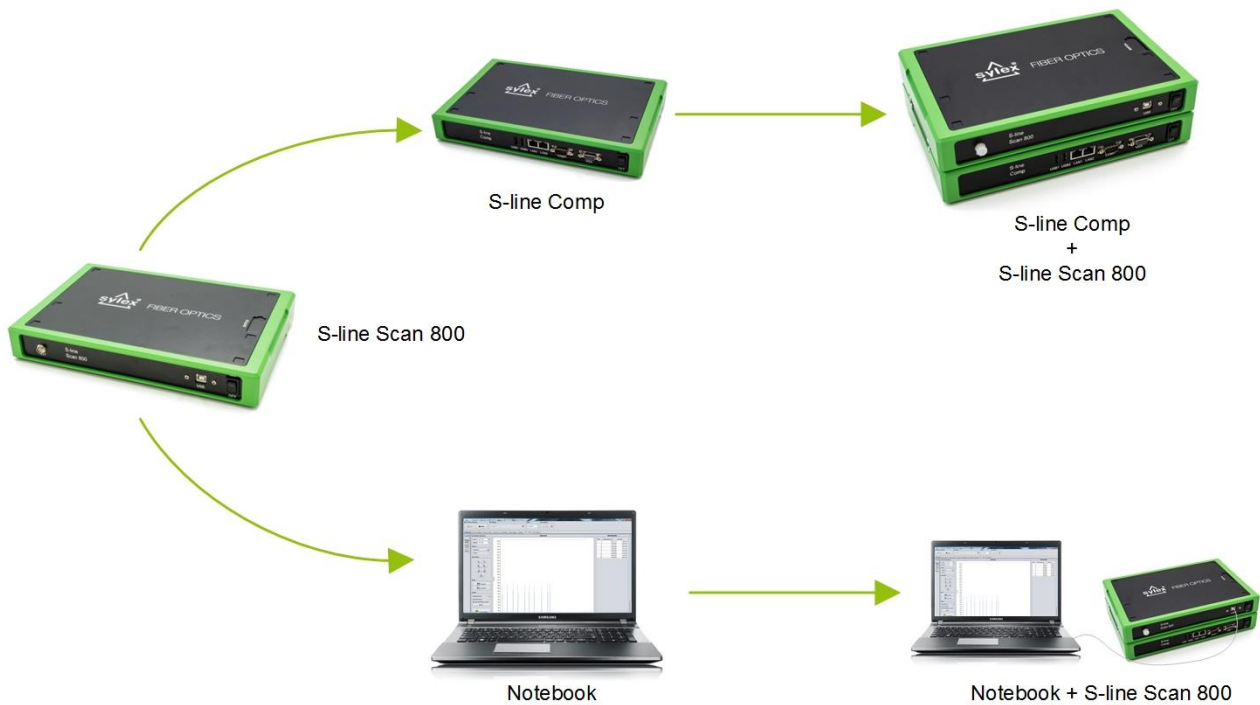

**Packaging options**



Figure 3: Cardboard box as standard packaging



Figure 4: Waterproof, crash proof and dust proof transportation case as optional packaging

For more information contact our sales team at [sales@sylex.sk](mailto:sales@sylex.sk)  
 \* Specifications are subject to change without notice